



HZRM08G

Diaphragm pressure regulator with relieving. Regulation knob with integrated lock and filter. Zamak body, brass internal organs, Hostaform bell, without panel ring nut.





with relieving



Technical characteristics


Threaded port	G 1/4
Flow rate NI/min (6 bar inlet pressure, 5 bar outlet pressure - Δp 1 bar)	340
Max. inlet pressure bar - MPa - psi	20 - 2 - 290
Pressure adjustment by relieving bar	1 ÷ 8
Fluid	filtered air
Temperature min/max °C	- 10 ÷ 50
Weight in kg	0,20
Pressure gauge port	G 1/8

Flow rate characteristics

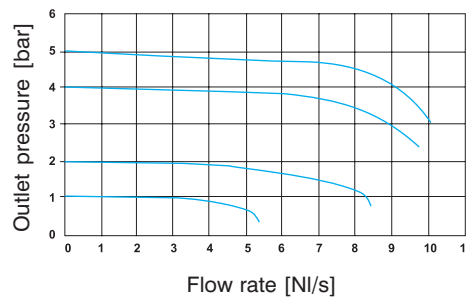


Accessories

Panel ring nut



HZOZ603

Wall mounting bracket



HZRM310

G 1/8 Grub screw



AZ-0200

Spare Parts


Regulator spring



Pressure adjustment

- 1 ÷ 8 std. **HZRM651**
- 0,1 ÷ 1,5 **HZRM652**
- 0,2 ÷ 3 **HZRM654**
- 0,5 ÷ 5 **HZRM656**
- 1,5 ÷ 15 **HZRM658**

Diaphragm assembly



HZRM610 with relieving
HZRM611 without relieving